

Бесконтактный инкрементальный энкодер HDN58

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>

SERIES HDN58

NorthStar™ brand

Shaft-Less Encoder

Key Features

- Incremental, Analog & Absolute Outputs Available
- Non-Contact Magnetic Sensing
- Sealed & Encapsulated Electronics
- Wide Sensing Envelope Tolerant to Misalignment



SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Resolution (Incremental): 1 to 512 quadrature pulses per revolution

Resolution (SSI Binary Absolute): 13 Bits

Resolution (J1939 CAN): 13 Bits

@ 1000 positions per rotation

Resolution (Analog): See Config Table

ELECTRICAL

Input Power: Quadrature Output Type: 6-32VDC, 60mA max not including output load

Analog Voltage & Current Output Type:

5VDC/6-32VDC or 12-32VDC

J1939 CAN & SSI Output Type:

6-32VDC

Outputs: 7272 Differential Line Driver: 40mA sink or source

Analog Voltage: 0.5-4.5VDC

Analog Current: 4-20mA

SSI Binary

J1939 CAN (250KB/s Baud): Optional

Addressing via varying value resistor connection

Electrical Protection: Overvoltage, Reverse

Polarity, Output Short Circuit Protected

Connections: M12, M12 on Pigtail, Flying Lead Cable, 5-Pin Terminal Strip

LED Indicators: Power and Output Channels

MECHANICAL

Housing Diameter: 58mm (2.28")

Housing Height (not including connection):

19mm (0.75")

Housing Material: Black Delrin

Weight: 2.6 oz

Target Magnet Type: Neodymium

Sensor-Target Magnet Ratings:

Air Gap (w/1/4-20 Magnet): 0.01" to 0.50"

Center Alignment (w/ 1/4-20 Magnet): 0.1" max.

Rated Planar Tilt: 30 degrees

Maximum Speed: 3000 RPM

ENVIRONMENTAL

Operating Temperature: -30°C to +80°C

Storage temperature: -40°C to +90°C

Shock: 400g, 4000 m/s² (6ms)

Vibration: 20g, 200 m/s² (5 to 3000Hz)

Potting Compound: Non-Porous. Water & Chemical Resistant. ROHS Compliant

Humidity: 100%

Enclosure Rating:


M12 - IP67

Flying Leads/Pigtail - IP69K

Terminal Strip - Connector not rated.

RoHS Compliant: YES

HDN58 Quadrature Output Format

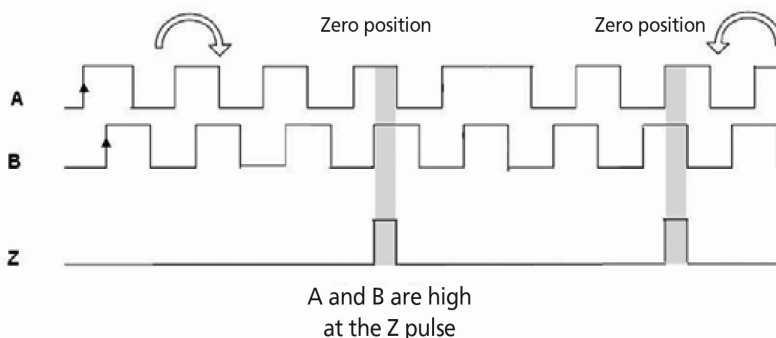

Ordering Information

To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: PPR	Code 3: Format	Code 4: Connection	Code 5: Target Magnet
HDN58	□□□□	□	□	□

Ordering Information				
HDN58	Incremental Output: Code 3 Must be 0 or 1	Code 4 must be 0, 1, 2 or 3	0 5 pin M12, Axial 1 5 Pin M12 on 18" Pigtail, Radial 2 5 Conductor 72" cable, Radial 3 5 Pin Terminal Strip, Axial 4 8 Pin M12, Axial 5 8 Pin M12 on 18" Pigtail, Radial 6 8 Conductor 18" cable, Radial	0 No Magnet, Customer Supplied 3 Dual Magnet Nylon Collar, 1/2" Bore 4 Dual Magnet Nylon Collar, 3/4" Bore 5 Dual Magnet Nylon Collar, 1" Bore 6 Dual Magnet Nylon Collar, 1-1/2" Bore 8 Dual Magnet Nylon Collar, 5/8" Bore R Ring Magnet w/Knurled Alumnum Bolt, 1/4-20
	Enter Custom Quadrature PPR from 0001-0512 Ex: 0001 = 1 PPR 0256 = 256 PPR 0500 = 500 PPR	0 Single Ended A, B, Z Push-Pull (7272) 6-32VDC in, 6-32VDC Out Code 4 must be 4, 5, or 6 1 Differential Line Driver A, B, Z (7272) 6-32VDC in, 6-32VDC Out 2 13 Bit SSI - 8192 Counts, 6-32VDC Input		
	Absolute Output: Code 3 must be 2, V1, V2, I1, or J ABSO	Code 2 must be ABSO and Code 4 must be 0, 1, or 2 V1 5VDC Input Voltage, 0.5 to 4.5V Output 0-360 CW V2 6-32VDC Input Voltage, 0.5 to 4.5V Output 0-360 CW I1 12-32VDC Input Voltage, 4-20mA Output 0-360 CW J CANbus J1939 Protocol, 6-32VDC Input at 1000 counts per rotation		

TARGET MAGNET ACCESSORIES

Part Number	Description
MAGH-RING	1/4-20 Knurled Magnet Bolt
MAGCOLLAR1/2	Dual Magnet Nylon Collar 1/2" Bore
MAGCOLLAR3/4	Dual Magnet Nylon Collar 3/4" Bore
MAGCOLLAR5/8	Dual Magnet Nylon Collar 5/8" Bore
MAGCOLLAR1	Dual Magnet Nylon Collar 1" Bore
MAGCOLLAR11/2	Dual Magnet Nylon Collar 1-1/2" Bore

SERIES HDN58



ELECTRICAL CONNECTIONS

Quadrature Signal Format

Function	5 Pin M12 Conn / 5 Pin M12 on Cable	5 Conductor Cable	Pin M12 Conn / 8 Pin M12 on Cable	8 Conductor Cable
	Pin	Wire Color	Pin	Wire Color
+VDC	1	BRN	2	BRN
Common	3	BLU	7	BLU
Signal A+	4	BLK	1	WHT
Signal B+	2	WHT	4	YEL
Signal Z+	5	GRY	6	PNK
Signal A-	-	-	3	GRN
Signal B-	-	-	5	GRY
Signal Z-	-	-	8	RED

Analog Signal Format

Function	5 Pin M12 Conn / 5 Pin M12 on Cable	5 Conductor Cable
	Pin	Wire Color
+VDC (Vin)	1	BRN
Common/Ground	3	BLU
Voltage (0-5VDC)	2	WHT
Current (4-20mA)	4	BLK
Common/Ground	5	GRY


CAN J1939 Signal Format

Function	5 Pin M12 Conn / 5 Pin M12 on Cable	5 Conductor Cable
	Pin	Wire Color
+VDC (Vin)	1	BRN
Common/Ground	3	BLU
CAN HIGH	2	WHT
CAN LOW	4	BLK
ADDRESS SET	5	GRY


SSI Signal Format

Function	8 Pin M12 Conn / 8 Pin M12 on Cable	8 Conductor Cable
	Pin	Wire Color
+VDC	2	BRN
Common	7	BLU
SSI Data+	1	WHT
SSI Data-	3	GRN
CLK +	4	YEL
CLK -	5	GRY
0 - 10VDC (not used)	6	PNK
RESET INPUT (not used)	8	RED

CONNECTORS




Male 5-pin M12 (Code A)



Male 8-pin M12 (Code A)

DIMENSIONS

5 Pin Terminal Strip Option

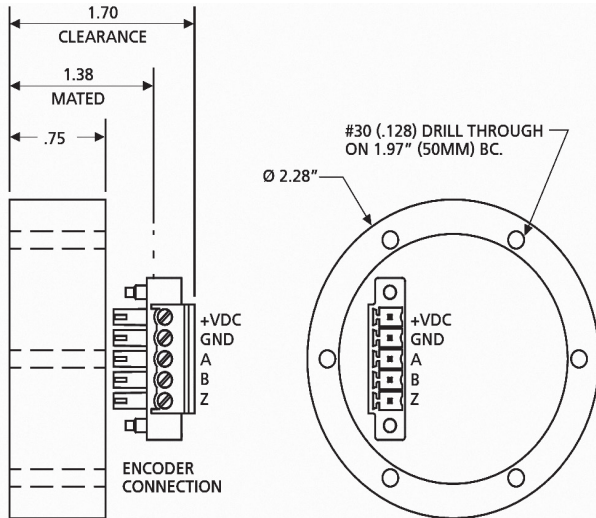

HDN58 TARGET MAGNETS

- Neodymium
- Distance from user magnet to face of encoder: up to 0.5 inches
- Center alignment: 0 to 0.10 inches
- Planar tilt: 30 degrees



(Magnet Options 3,4,5,6,8)



(Magnet Option R)

M12 and Cable Exit Options

MAGNET NOTE:

STANDARD MAGNET INCLUDED AS ACCESSORY WITH PURCHASE OF NON-CONTACT SENSOR

STANDARD MAGNET

MAG-RING
1/4-20 X .47




HOUSING/INSTALL NOTES:

MAGNET MOUNT MATERIALS MUST HAVE Ø1.0 [25.4] HOLE CENTERED ON SENSOR CENTERLINE



NON-MAGNETIC MOUNT MATERIAL, MAY BE SOLID

MOUNT WITH 316 STAINLESS STEEL 4-40 SCREWS

SENSOR FACE



OPTIONAL CABLE SIDE OUTLET
CABLE WITH FLYING LEADS
OR CABLE WITH M12-5

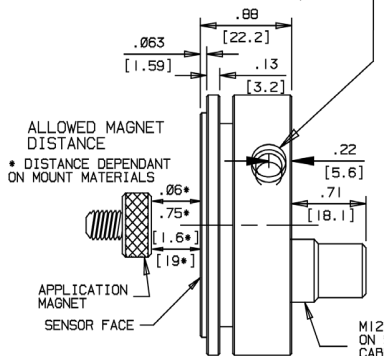

M12-5P OMITTED
ON SIDE OUTLET,
CABLE & FLYING
LEAD VERSIONS.

EPOXY POTTED
ELECTRONICS

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>