

Энкодер с инкрементальным валом NexGen 22

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>

NexGen SERIES 22



"QUBE" Encoder

Key Features

- Up to 20,000 Pulses Per Revolution
- IP67 Sealing Options for Shaft & Cable Exit Designs
- Wide Temperature Range for Challenging Environments
- Robust Bearing Design for Superb Shaft Loading
- Dual Shaft Option for Mechanical Redundancy

IND
Industrial Duty

SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Code: Incremental, Optical**Resolution:** 1 to 20,000 PPR (pulses/revolution)**Format:** Two channel quadrature (AB) with optional Index (Z), and complementary outputs**Phase Sense:** A leads B for CW shaft rotation when viewing the shaft farthest from connector or cable**Quadrature Phasing:** $90^\circ \pm 30^\circ$ electrical**Symmetry:** $180^\circ \pm 25^\circ$ electrical**Index:** 180° default gated to B low**Waveforms:** Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pF

ELECTRICAL

Input Power: 5-26VDC; 75 mA max., not including output loads.**Outputs:**

7272 Push-Pull: 40mA, sink or source

7272 Differential Line Driver: 40 mA, sink or source

7273 Open Collector: 40mA, sink max

Frequency Response: 200 kHz (data and index)**Noise Immunity:** Tested to EN61326-1**Electrical Immunity:** Reverse polarity and short circuit protected**Mating Connector:**

6 pin, style MS3106A-14S-6S (MCN-N4)

7 pin, style MS3106A-16S-1S (MCN-N5)

5 pin, style M12: Cable with connector available

8 pin, style M12: Cable with connector available

Termination: MS Connector, M12 Connector or Cable Exit


MECHANICAL

Shaft Sizes: 6mm, 1/4" or 3/8"**Shaft Loading:** 80 lbs. radial, 80 lbs. axial**Shaft Speed:** 6,000 RPM max.**Shaft Tolerance:** Nominal $-.0003"/-0.0006"$ **Starting Torque:** 2.5 oz-in max.; w/shaft seals
4.0 oz-in max.; w/double shaft seal 6.0 oz-in max.**Housing and Cover:** Aluminum**Shaft Material:** Stainless Steel**Disc Material:** Aluminum**Weight:** 14 oz. max.

ENVIRONMENTAL

Operating Temperature: -40 to $+100^\circ\text{C}$ **Storage Temperature:** -40 to $+100^\circ\text{C}$ **Shock:** 100Gs for 11 milliseconds duration**Vibration:** 5 to 2000 Hz at 20Gs**Humidity:** Up to 98% (non-condensing)**Enclosure Rating:** IP67 with shaft seals

STANDARD DATA AND INDEX

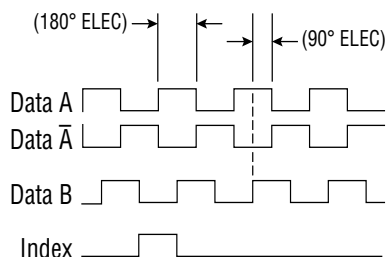Not all complements shown
A shown for referenceIndex Width: 180° Default
A leads B, CW (from shaft end)

NexGen SERIES 22



ORDERING INFORMATION

To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: Pulses/Rev	Code 3: Mechanical	Code 4: Output	Code 5: Electrical	Code 6: Termination
22 Qube Encoder, Bidirectional 22M Metric Qube Encoder, Bidirectional	Enter Custom Quadrature PPR from 1 to 20,000 Examples: 0001 = 1 PPR 0256 = 256 PPR 1000 = 1000 PPR 9999 = 9999 PPR A000 = 10,000 PPR B000 = 11,000 PPR C999 = 12,999 PPR : : G000 = 16,000 PPR G384 = 16,384 PPR H000 = 17,000 PPR J000 = 18,000 PPR K000 = 19,000 PPR L000 = 20,000 PPR Note: Letter "I" is skipped and not used	Available only when Code 1 is 22 0 3/8" Double ended shaft 1 3/8" Single ended shaft 2 1/4" Double ended shaft 3 1/4" Single ended shaft A Same as "0" with shaft seal B Same as "1" with shaft seal C Same as "2" with shaft seal D Same as "3" with shaft seal Available only when Code 1 is 22M 4 6mm Double ended shaft 5 6mm Single ended shaft E Same as "4" with shaft seal F Same as "5" with shaft seal	Available for all Code 6 options 0 Single Ended, Table 1 1 Single Ended, with Index, Table 3 2 Differential, Table 2 Available only when Code 6 is 1 to 5 or A to E: 3 Differential, with Index, Table 5 Available only when code 6 is 0: 4 Differential, Table 4 Available only when Code 6 is 6: 5 5 pin M12 connector, single ended, no index, Table 6 6 5 pin M12 connector, single ended, with index, Table 6 7 8 pin M12 connector, single ended, no index, Table 7 8 8 pin M12 connector, single ended, with index, Table 7 9 8 pin M12 connector, differential, no index, Table 8 A 8 pin M12 connector, differential, with index, Table 8	Available when Code 4 = 0, 1, 5, 6, 7 or 8: 0 5-26 VDC in, 5-26 VDC Open Collector w/2.2k pull-ups out 1 5-26 VDC in, 5-26 VDC Open Collector w/o pull-up out 2 5-26 VDC in, 5V Totem Pole out Available when Code 4 = 2, 3, 4, 9 or A: 3 5-26 VDC in, 5V Line Driver out 4 5-26 VDC in, 5-26 VDC CMOS Line Driver	Available for all Code 3 and Code 4 Options 0 MS Connector Available when Code 3 is 0, 1, 2, 3, 4 or 5 1 18" Cable 2 3' Cable 3 6' Cable 4 10' Cable 5 15' Cable Available when Code 4 is 5, 6, 7, 8, 9 or A 6 M12 Connector Available when Code 3 is A,B,C,D,E or F A 18" Sealed Cable B 3' Sealed Cable C 6' Sealed Cable D 10' Sealed Cable E 15' Sealed Cable

Please see page 5 for compatible accessories.

NexGen SERIES 22



ELECTRICAL CONNECTIONS

MS CONNECTOR ACCESSORY CABLES - WHEN CODE 4 = 0 TO 4

Connector and mate/accessory cable assembly pin numbers and wire color information is provided here for reference.

Table 1 - Current Sink Output		
Encoder Function	Cable # 1400607XXXX 6 Pin Single Ended	
	Pin	Wire Color Code
Common	A	BLK
Power Source	B	RED
Case	C	GRN
Signal A	D	BRN
Signal B	E	ORG
Common	F	BLK

Table 2 - 7 Pin Line Driver Output		
Encoder Function	Cable # 1400431XXXX 7 Pin Differential Line Driver	
	Pin	Wire Color Code
Signal A	A	RED
Signal B	B	BLU
Signal $\bar{A}$	C	YEL
Power Source	D	WHT
Signal $\bar{B}$	E	GRN
Common	F	BLK
Case	G	—

Table 3 - Current Sink Output w/ Marker		
Encoder Function	Cable # 108241-XXXX 6 Pin Single Ended w/Index Outputs	
	Pin	Wire Color Code
Common	A	BLK
Power Source	B	RED
Signal $\bar{Z}^*$	C	GRN
Signal A	D	BRN
Signal B	E	ORG
Common	F	BLK

Table 4 - 6 Pin Line Driver		
Encoder Function	Cable # 1400664XXXX 6 Pin Differential	
	Pin	Wire Color Code
Common	A	BLK
Power Source	B	RED
Signal A	C	BRN
Signal $\bar{A}$	D	BRN/WHT
Signal B	E	ORG
Signal $\bar{B}$	F	ORG/WHT

Table 5 - Cable Termination Line Driver Output with Marker	
Encoder Function	Wire Color Code
Signal A	BRN
Signal B	ORG
Signal $\bar{Z}^*$	YEL
Power Source	RED
Com	BLK
Case	GRN
Signal $\bar{A}$	BRN/WHT
Signal $\bar{B}$	ORG/WHT
Signal $\bar{Z}^*$	YEL/WHT

5 & 8 PIN M12 ACCESSORY CABLES - WHEN CODE 4 = 5 TO 9 AND A

Connector pin numbers and cable assembly wire color information is provided here for reference.

Encoder Function	Cable #112859-XXXX 5 Pin Single Ended		Cable #112860-XXXX 8 Pin Single Ended		Cable #112860-XXXX 8 Pin Differential	
	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Signal A	4	BLK	1	BRN	1	BRN
Signal B	2	WHT	4	ORG	4	ORG
Signal $\bar{Z}^*$	5	GRY	6	YEL	6	YEL
Power +V	1	BRN	2	RED	2	RED
COM	3	BLU	7	BLK	7	BLK
Signal $\bar{A}$	—	—	—	—	3	BRN/WHT
Signal $\bar{B}$	—	—	—	—	5	ORG/WHT
Signal $\bar{Z}^*$	—	—	—	—	8	YEL/WHT


NOTES:

- 1) Cable Configuration (Tables 1 and 3 - 5): PVC jacket, 105° C rated, overall foil shield; 3 twisted pairs 26 AWG (output signals), plus 2 twisted pairs 24 AWG (input power)
- 2) Cable Configuration (Table 2): PVC jacket, 105° C rated, overall foil shield; 22 AWG conductors, minimum
- 3) Cable Configuration (Tables 6 - 8): PVC jacket, 105° C rated, overall foil shield; 24 AWG conductors, minimum
- 4) Standard cable length is 10 feet but may be ordered in any length in 5 foot increments. For example, for a 20 foot cable, replace -XXXX with -0020
- 5) * Index not provided on all models. See ordering information.
- 6) "MS" Type mating connectors and pre-build cables are rated NEMA 12
- 7) "M12" Cable assemblies are rated IP67

NexGen SERIES 22



Dimensions: inch [mm]

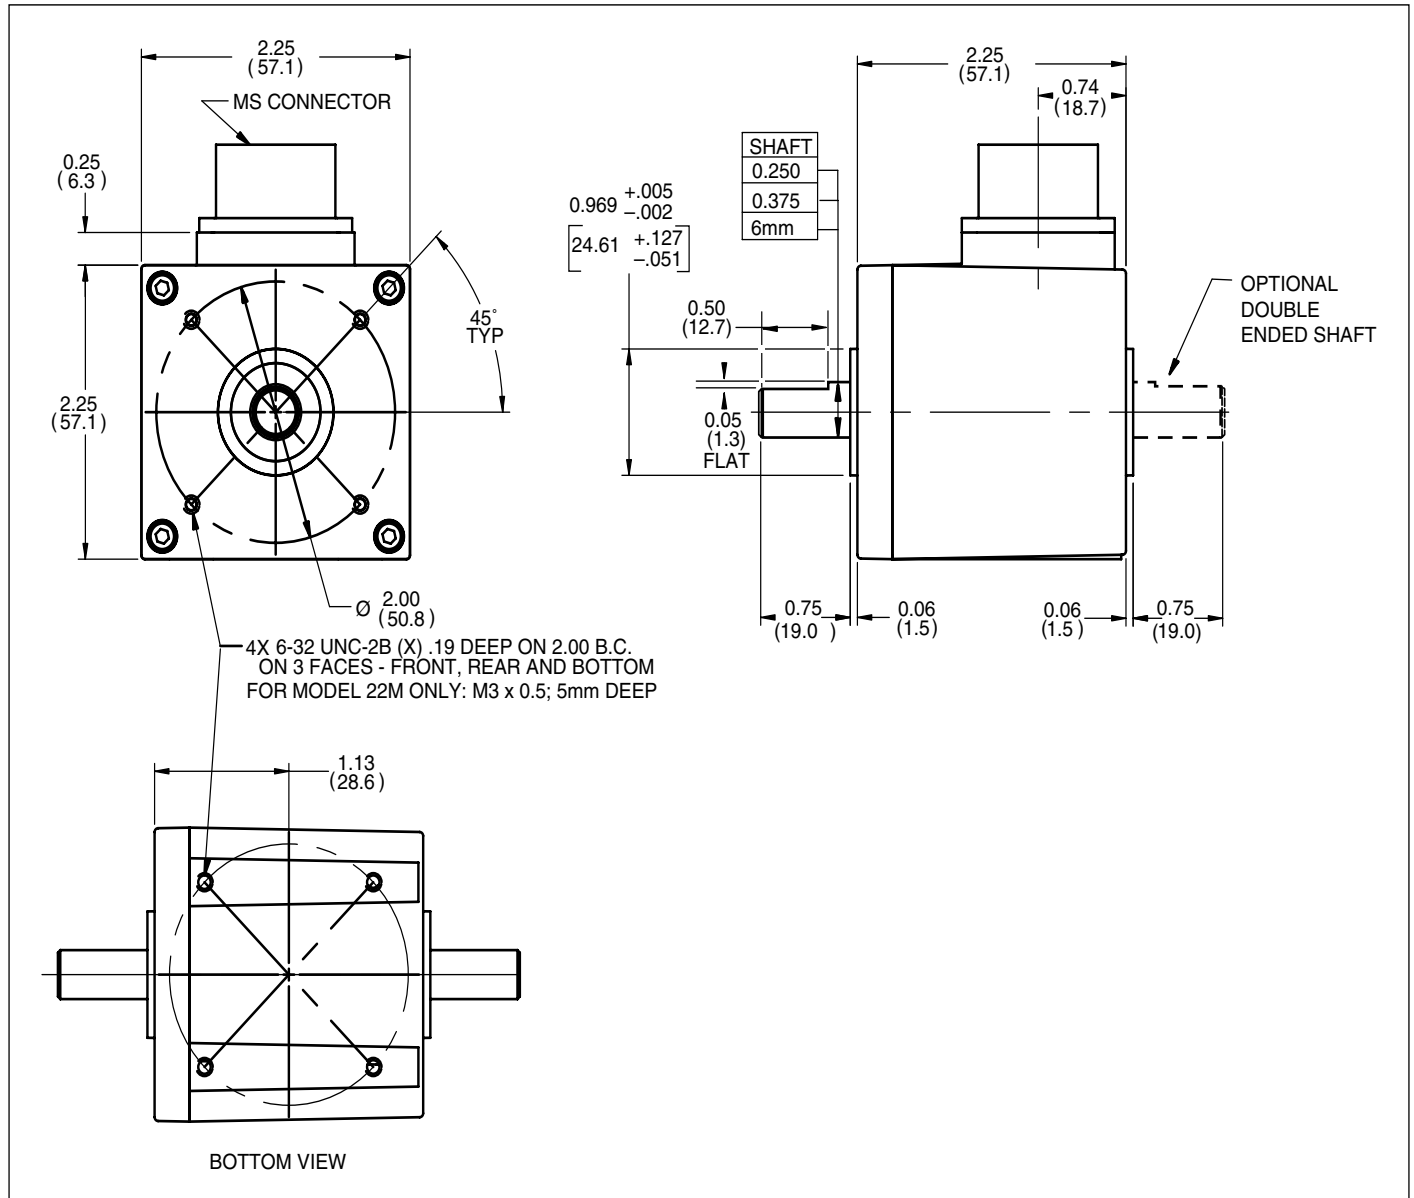

NexGen SERIES 22

Mating Cables

Part Number	Pins		Compatibility
112859-XXXX	5 Pin M12	Connector, Cable Assembly	Code 4: Option 5 or 6; Single Ended Outputs
1400607XXXX	6 Pin MS		Code 4: Option 0; Single Ended outputs, (w/o Markers), 6 Wires
108241XXXX	6 Pin MS		Code 4: Option 1; Single Ended w/Index Outputs
1400664XXXX	6 Pin MS		Code 4: Option 4; Differential Line Driver Outputs, 6 Wires
1400431XXXX	7 Pin MS		Code 4: Option 2; Differential Line Driver Outputs, 7 Wires
112860-XXXX	8 Pin M12		Code 4: Option 7, 8, 9 or A; Single Ended or Differential Line Drive Outputs

***Note:** Standard cable length is 10 feet but may be ordered in any length in 5 foot increments.
For example, for a 20 foot cable, replace XXXX with -0020.

See page 2
for code descriptions

Measuring Wheels

Part Number	Description	Compatibility
112919-0001	White rubber measuring wheel, 3/8" Bore, 12" circumference	Code 3: Option 0, 1, A, or B
16002070177	Phenolic measuring wheel, 3/8" Bore, 12" circumference	
16002070284	Measuring wheel, 2 rubber O-Rings around circumference, 3/8" bore, 12" circumference	
16002070046	Replaceable o-rings for measuring wheel part number 16002070284	

Flexible Couplings

Part Number	Bore size		Diameter	Length	Compatibility
	Primary	Secondary			
FCPL00750250	1/4"	1/4"	0.750"	0.875"	Code 3: Option 2, 3, C or D
FCPL01000250	1/4"	1/4", 3/8"	1.000"	1.250"	Code 3: Option 0, 1, 2, 3, A, B, C or D
FCPL01250250	1/4"	1/4", 3/8"	1.000"	1.250"	
FCPL01000375	3/8"	3/16", 3/8"	1.250"	1.250"	Code 3: Option 0, 1, A, or B
FCPL01250375	3/8"	3/8", 1/2"	1.250"	1.250"	
FCPL01500375	3/8"	3/8", 1/2"	1.500"	1.500"	
FCPL01250500	1/2"	1/4", 1/2"	1.250"	1.250"	Code 3: Option 2, 3, C or D
FCPL01500625	5/8"	3/8", 5/8"	1.500"	1.500"	Code 3: Option 0, 1, A, or B
FCPL02000875	7/8"	3/8", 5/8"	2.000"	2.000"	
FCPL02001000	1"	3/8", 5/8"	2.000"	2.000"	
FCPL02001125	1-1/8"	3/8", 5/8"	2.000"	2.000"	
FCPLM1000250	1/4"	4, 5, 6 mm	1.000"	1.250"	Code 3: Option 2, 3, 4, 5, C, D, E or F
FCPLM1250375	3/8"	6, 8, 10 mm	1.250"	1.250"	Code 3: Option 0, 1, A, or B
FCPLM1500500	1/2"	6, 8, 10 mm	1.500"	1.500"	
FCPLM12506MM	6 mm	4, 5, 6 mm	1.250"	1.500"	
FCPLM100010MM	10 mm	6, 8, 10 mm	1.000"	1.000"	

Encoder Single Splitter

Part Number	Description	Compatibility
RIMSS2	RIMSS2 Signal splitter for all incremental encoders operating between 5-26VDC	All

Adapters and Brackets

Part Number	Description	Compatibility
108680-0001	L Mounting bracket	Code 1: Option 22
111328-0001	Qube pivot mounting base	All

Connectors

Part Number	Description	Compatibility
MCN-N4	6 pin MS Mating connector and clamp, style MS3106A-14S-6S	Code 4: Option 0, 1 or 4
MCN-N5	7 pin MS Mating connector and clamp, style MS3106A-16S-1S	Code 4: Option 4

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>