

Бесщеточная цифровая обратная связь FV2 Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>


SERIES FV2

Dynapar™ brand

Brushless Digital Feedback

Key Features

- Bidirectional Frequency/Voltage or Frequency/Current Converter
- An FV2 and an Encoder Replace a DC Tachometer when Precision Feedback is Required.

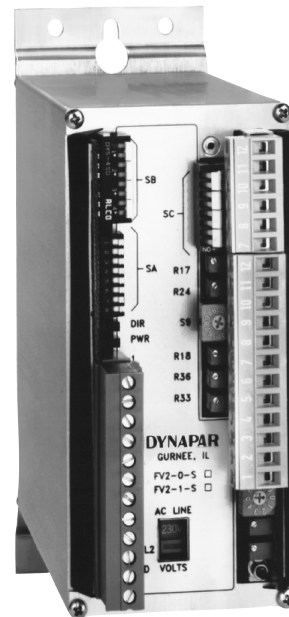

SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Electrical

Input Power Requirements: 115/230 VAC $\pm 10\%$, 50/60 Hz; 120 mA @ 115 VAC, 60 mA @ 230 VAC
Available Power for the Transducer: 12 VDC $\pm 5\%$, 200 mA max.

Input Signal: (Field-Selectable) 4 to 15V differential; or 8 to 15V single-ended; or magnetic 1.5 to 15V peak-to-peak

Input Frequency Range: (Field-Selectable)
 Bidirectional: 0-500 Hz to 0-100 kHz;
 Unidirectional: 0-1 kHz to 0-100 kHz;

Analog Output: $\pm 10V$ bidirectional; 0-10V unidirectional @ 25 mA

Output Linearity: $\pm 0.1\%$ of span

Temperature Stability: $\pm 0.2\%$ per $^{\circ}F$

Current Range: 4-20 mA

Current Linearity: $\pm 0.2\%$ max.

Compliance: $\pm 16V$ min.

Response Time: < 10 msec. switch selectable to < 20 , < 36 , or < 46 msec.

Output Ripple: Volts RMS is generally less than brush generators and is predictable depending on input frequency from an encoder. For 240 PPR, open loop ripple is 0.080V at 25 RPM, 0.03V at 250 RPM and 0.015V at 2500 RPM

Output Overrange: 10% min. (volt. or current)

Output Offset: Adjustable

Environmental

Operating Temperature: 0 to $60^{\circ}C$

Storage Temperature: -18° to $+85^{\circ}C$

Relative Humidity: to 90% non-condensing

OPTIONAL FEATURES

The following features are available with the FV2 option board, which can be factory- or field-installed:

Auxiliary Isolated Digital Outputs

When supplied separately with 12 ± 3 VDC, an isolated digital differential line driver output is supplied corresponding to the A and B input phases. By connecting the analog power supply cable to the option board, the analog outputs can also be powered by the separate supply and optically isolated from the digital inputs.

Transducer Phase Reversal Detector

This feature monitors the A and B phases and detects reverse rotation. When reversal is detected, there is a user-selectable delay (2048 pulses max.) before the output relay drops out. The relay will not re-energize until: 1) the reset button is pressed, 2) an external reset signal is applied, or 3) power is removed and restored. An inhibit input is provided to override the reversal detection circuit.

Transducer Phase Failure Detector

This feature monitors the A and B phase inputs and detects a failure (i.e. one phase failed high or low). Its output is a normally-open relay contact which opens upon failure detection. This relay contact is shared with a Phase Loss Detection circuit.

Transducer Phase Loss Detector

This feature monitors current supplied to the encoder and reacts to a decrease in current required. Failure is indicated by opening the relay contact shared with the Phase Failure Detector. Current trip level is field-adjustable. Transducer supply must be provided by FV2.

Zero Speed Detector

This feature monitors transducer speed, and can be set by the user to trip at a specific level corresponding to desired speed. A relay with a single-pole-double-throw contact is used for the output.

SPECIFICATIONS FOR FV2 OPTIONS

Auxiliary Digital Outputs

Power Requirements: 12 ± 3 VDC

Current Requirements: 25 mA w/ digital outputs only; 250 mA w/ analog outputs only

Outputs	Voltage Range	Sink (mA)	Source (mA)	Standard IC
Differential Line Driver	12 ± 3 VDC	22	40	88C30

Transducer Reversal Detector

Forward Input Phasing: A leads B

Reversal Delay: 16, 32, 64, 128, 256, 512, 1024, or 2048 pulses, selectable.

Output: Relay contacts*, latched upon failure.

Latch Reset & Inhibit Input Requirements: TTL/CMOS, activates on high, 10K pull-down, 17V max.

Transducer Phase Failure Detector

Failure Type: A or B phase

Delay: 4 transitions

Output: N.O. contact* shared with Phase Loss Detector

Transducer Phase Loss Detector

Current Level: 30 to 200 mA, adjustable

Output: N.O. contact* shared with Phase Failure Detector

Zero Speed Detector

Adjustable Range: 10 Hz to 300 Hz

Response Time: Less than 0.1 sec.

Output: SPDT relay contact*

*Relay contacts are rated at (1) 1.0 amps, 24 VDC, or (2) 0.3 amps, 115 VDC resistive, or (3) 0.3 amps, 24 VDC, or (4) 0.2 amps, 115 VAC inductive.

ORDERING INFORMATION

Model No.	Description
FV2-0-S	Frequency-to-Voltage Converter
FV2-1-S	Same as FV2-0-S with Factory-Installed Option Board
FV2-N1	Option Board Only (Kit for Field Installation with FV2-0-S)
845-24*	Technical Manual

*A technical manual is automatically included with each FV2 unit shipped. Use this publication number for ordering extra copies.

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>