

Сверхмощный резольвер RF25

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>

SERIES RF25

Heavy Duty Resolver

- Flange Mount Rugged Housing Immune to Oil, Salt, Water & Dust
- Spaced Bearings for up to 10x the Life of Traditional Duplex Bearings
- Withstands 200g Shock and 40g Vibration
- Shaft Seal Standard
- Suitable Replacement for the Reliance Automax Resolvers 800123-2R and 800123-2S*



Most Models

STANDARD OPERATING CHARACTERISTICS

ELECTRICAL	1J Winding	2J Winding
Sensing Method	Sine/Cosine	Sine/Cosine
Electrical Cycles	1	2
Excitation	26 Vrms - 2.4 kHz	26 Vrms - 2.4 kHz
Input Current	22 Max mArms	45 Max mArms
Null Voltage	25 Max mVrms	25 Max mVrms
Electrical Error	10 ArcMin Max	10 ArcMin Max
DC Resistance (R1-R2)	255 Ohms	190 Ohms
DC Resistance (S1-S3 and S2-S4)	176 Ohms	322 Ohms
Transformation Ratio	0.454	0.454
Phase Shift	6 degrees	18 degrees
Dielectric Strength to Case	500 VAC w/2 Max mArms	500 VAC w/2 Max mArms
Dielectric Strength to Phase to Phase	250 VAC w/2 Max mArms	250 VAC w/2 Max mArms

MECHANICAL

Shaft Size: 3/8"

Mounting Type: Square Flange

Max Radial Shaft Load: 60 lbs.

Max Axial Shaft Load: 40 lbs.

Max Continuous Speed: 6,000 RPM

Moment of Inertia: .004 oz-in-sec²

Bearing Life: 2x10⁸ Revs at rated shaft load

Housing and Cover: Aluminum


Shaft Material: 416 Stainless Steel

Weight: 1.6 lbs.

ELECTRICAL CONNECTIONS

Connector:	7 pin MS	10 pin MS	6 pin MS Clicklock	19 pin MS Clicklock	
Signal	Pin	Pin	Pin	Pin	Cable Color
R1 (Rotor Hi)	A	A	E	A & B	Red w/ White
R2 (Rotor Lo)	B	H	F	C & D	Yellow w/White
S1 (Cos Hi)	C	B	C	E & F	Red
S3 (Cos Lo)	D	I	D	G & H	Black
S4 (Sin Lo)	F	C	B	L & M	Blue
S2 (Sin Hi)	E	J	A	J & K	Yellow w/Blue
N/C	G	G	-	-	-

SCHEMATIC

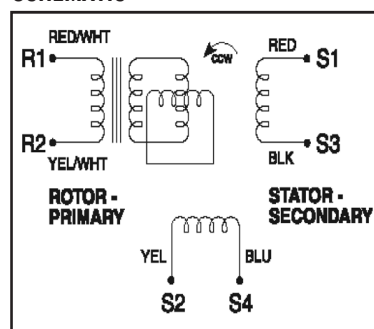

*Reliance and Automax are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement.


To order, complete the model number with code numbers from the table below:

DIMENSIONS inches [mm]



Note: Dimensions are dependent on Connector type - Shown with MS3112E-18-11P

SHAFT WITH 2 FLATS



CA-18-R-0010: 10 ft.cable with MS3106F-18-1S Connector

CA-16-R-0010: 10 ft.cable with MS3106F-16S-1S Connector

Note: Part numbers listed with -0010 are for 10 Foot Cable; use -0050 for 50 Foot Cable, etc

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>