

Инкрементальный энкодер для опасных зон HSD35

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>

HAZARDOUS SERIES HSD35


NorthStar™ brand

Hazardous Duty Encoder

Key Features

- UL Certified for Hazardous Applications
- Class I and Class II Division 2
- Dual Isolated Output Option for Redundancy
- Accomodates Shaft Sizes up to 1.25" (Electrically isolated up to 1.125")

HAZ
Hazardous Duty



SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Code: Incremental, Optical
Resolution: 1 to 9,000 PPR (pulses/revolution)
Format: Two channel quadrature (AB) with optional Index (Z), and complementary outputs
Phase Sense: A leads B for CW shaft rotation viewing the shaft clamp end of the encoder
Quadrature Phasing: 90° ± 30° electrical
Symmetry: 180° ± 25° electrical
Index: 180° default gated to B low
Waveforms: Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pf

ELECTRICAL

Input Power: 5-26VDC, 5-15VDC. 50 mA max., not including output loads.
Outputs:
7272 Push-Pull: 40mA, sink or source
7272 Differential Line Driver: 40 mA, sink or source
7273 Open Collector: 40mA, sink max
4469 Differential Line Driver: 100mA, sink or source
2707 Differential Line Driver: 60mA, sink or source
Frequency Response: 200 kHz (data and index)
Noise Immunity: Tested to EN61326-1
Electrical Immunity: Reverse polarity (all models); Short Circuit protection (7272, 7273, and 2707 line drivers only)
Termination: Pluggable screw terminals, inside terminal box with 1/2" conduit connector

MECHANICAL


Bore Diameter: 6mm to 28mm, 1/4" to 1.25", electrically isolated
Mounting Configuration: Hollow Bore, direct mount over shaft with multiple tether options available
Mating Shaft Length: 1.25", Minimum, 1.60", Recommended
Shaft Speed: 6000 RPM, Maximum (Enclosure Rating is IP64 at speed over 5000 RPM)
Starting Torque: 11.0 in.-oz. maximum (at 25°C)
Running Torque: 5.0 in.-oz. maximum (at ambient)
Bearings: ABEC 3
Housing and Cover: Hard Anodized and Powder Coated Aluminum
Shaft Material: Stainless Steel
Disc Material: Aluminum
Weight: 3.2 lb (51.2 oz) Typical

ENVIRONMENTAL

Operating Temperature: -40 ° to +85 °C with 7272 Line Driver; -40 ° to +70 °C with 4469 line driver; see "Ordering Information "). At shaft speed above 3000 RPM, derate 10 °C per 1000 RPM
Storage Temperature: -40 to +100°C
Shock: 400g, 6ms
Vibration: 5 to 3000 Hz, 20g
Humidity: Up to 98% (non-condensing)
Enclosure Rating: IP67 (IP64 at shaft speeds above 5000RPM)
Hazardous Location Certification:
Class I, Division 2, Groups A, B, C and D;
Class II, Division 2, Groups F and G

STANDARD DATA AND INDEX

Not all complements shown
A̅ shown for reference

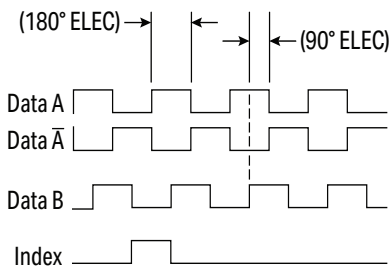

Index Width: 180° Default
A leads B, CW (from clamp end)

HAZARDOUS SERIES HSD35

NorthStar™ brand

ORDERING INFORMATION


To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: PPR	Code 3: Bore Size	Code 4: Fixing	Code 5: Output Format	Code 6: Options
HSD35	☐ ☐ ☐ ☐	☐	☐	☐	☐
HSD35 Hazardous Series, Hollowshaft Encoder	Enter Custom PPR from 0001 to 9000 Examples: 0001 = 1 PPR 0256 = 256 PPR 1024 = 1024 PPR 8192 = 8192 PPR 9000 = 9000 PPR	Electrically Isolated (Non-Metallic Insert) 0 6mm 1 1/4" 2 5/16" 3 8mm 4 3/8" 5 10mm 6 12mm 7 1/2" 8 5/8" 9 15mm A 16mm C 19mm D 3/4" E 20mm F 7/8" G 24mm H 1" J 1-1/8" M 14mm N 18mm P 25mm R 28mm Not Electrically Isolated (No Insert) K 1-1/4"	Stamped Metal 0 None 1 4.5" C-Face Tether 2 8.5" C-Face Tether 3 Slotted Tether 4 Same as "1" with 56 C-Face Cover 5 Same as "3" with Cover 6 Same as "2" with 180 C-Face Cover Swivel Rod A AC Motor Fan Cover Tether with T-bolt B 4.5" C-Face Tether with 3/8" Bolt C 8.5" C-Face Tether with 1/2" Bolt D Same as "A" with Cover Kit E Same as "B" with Cover Kit	0 Single Ended ABZ, 5-26VDC push-pull (7272) 1 Single Ended ABZ, 5-26VDC O/C (7273) 2 Single Ended ABZ, 5-26VDC O/C w/2.2kOhm (7273) 4 Differential AB only, 5-26VDC in, 5-26V out (7272) 5 Differential AB only, 5-26VDC in, 5V out (7272) A Differential AB, 5-26VDC in, 5V out (4469) C Differential AB, 5-15VDC in, 5-15V out (4469) 6 Differential ABZ, 5-26VDC in, 5V out (7272) 7 Differential ABZ, 5-26VDC in, 5-26V out (7272) 8 Differential ABZ, 5-26VDC in, 5V out (4469) 9 Differential ABZ, 5-15VDC in, 5-15V out (4469) D Dual Isolated Outputs, same as "6" E Dual Isolated Outputs, same as "7" F Dual Isolated Outputs, same as "8" G Dual Isolated Outputs, same as "9" W Differential ABZ, 10-24VDC in, 10-24V out (2707)	D2

COMPATIBLE ACCESSORIES

114573-0001	Tether Kit, 4.5" C-Face Single Point with 3/8" bolt
114574-0001	Tether Kit for Standard AC Motor Fan Covers with T-bolt
114575-0001	Tether Kit, 8.5" C-Face Single Point with 1/2" bolt
756-042-01	Rod Tether, AC Motor Fan Cover with T-bolts
756-043-01	Rod Tether Kit, 4.5" C-Face with 3/8" bolt
756-044-01	Rod Tether Kit, 8.5" C-Face with 1/2" bolt
114622-0001	Cover Kit, 56 C-Face (single or dual output)
114928-0001	Cover Kit, 180 C-Face (single or dual output)
114623-0001	Cover Kit, Fan Cover (single or dual output)

ELECTRICAL CONNECTIONS

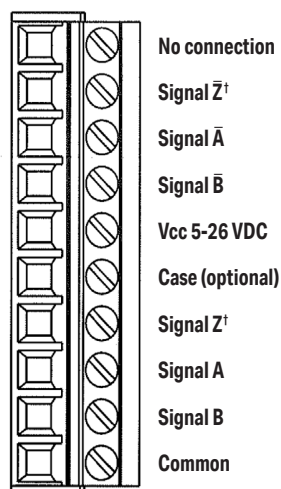


[†] Index not provided on all models.
See ordering information

HAZARDOUS SERIES HSD35


NorthStar™ brand

Dimensions: inch [mm]

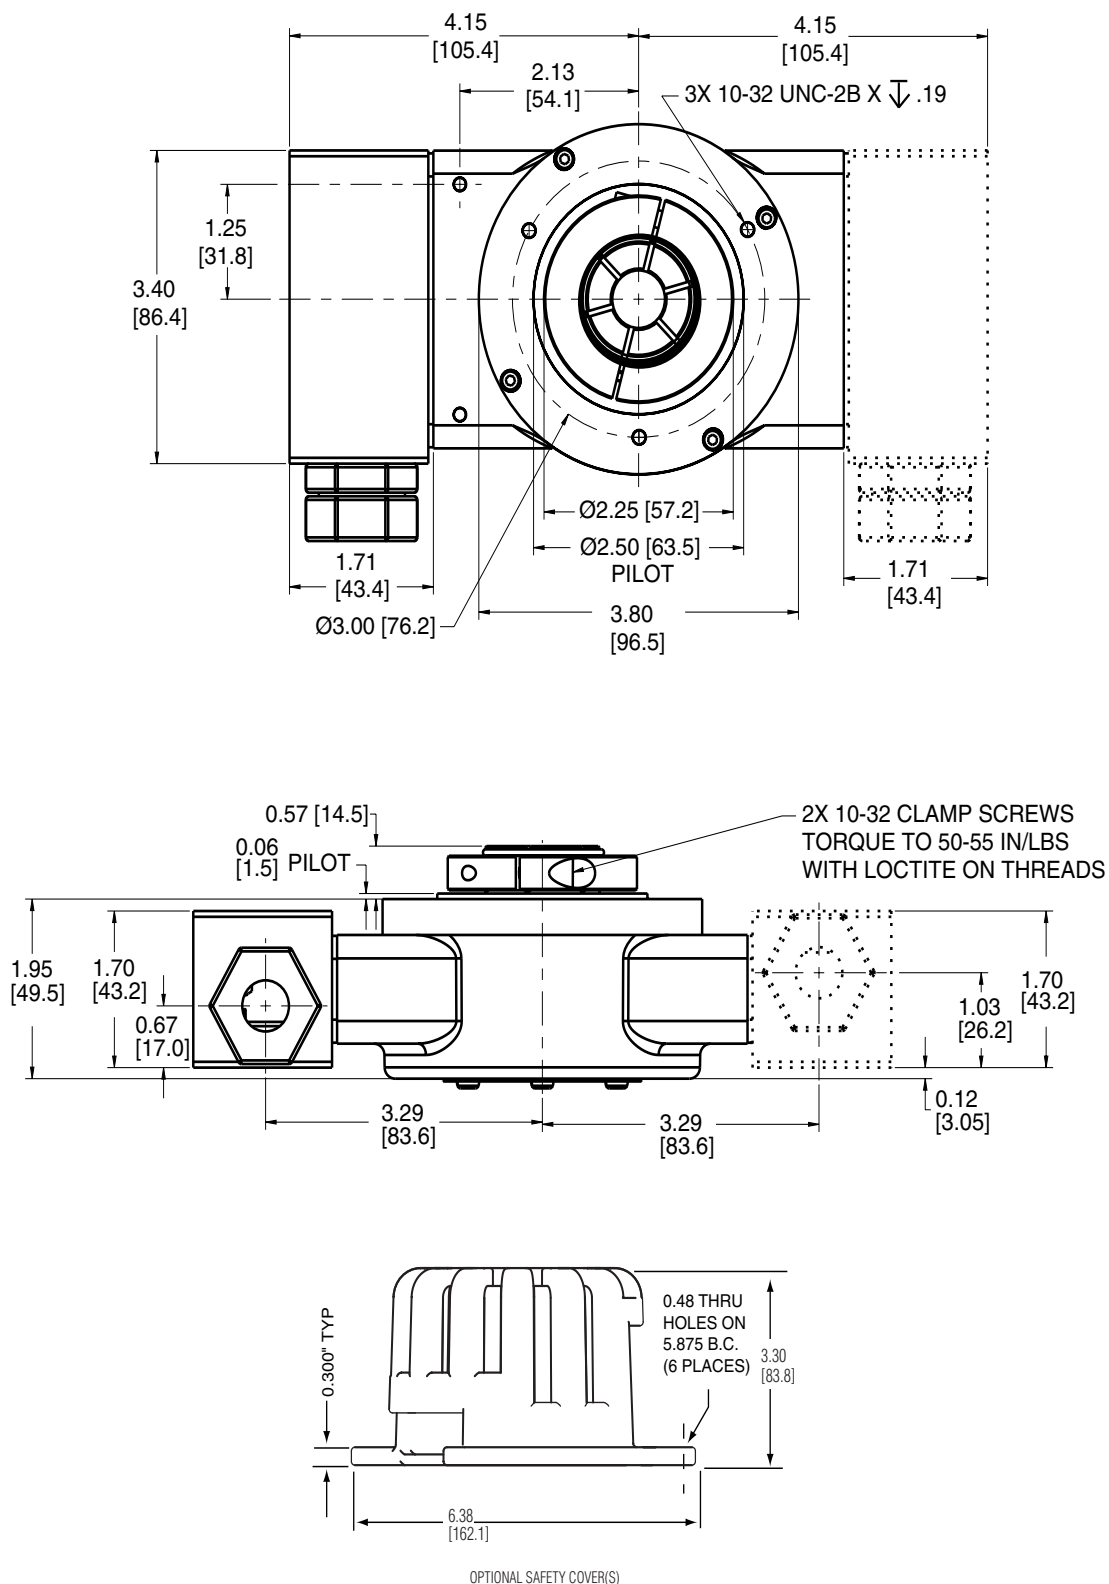


Dimensions: inch [mm]


114573-0001 TETHER KIT (4.5" C- FACE)

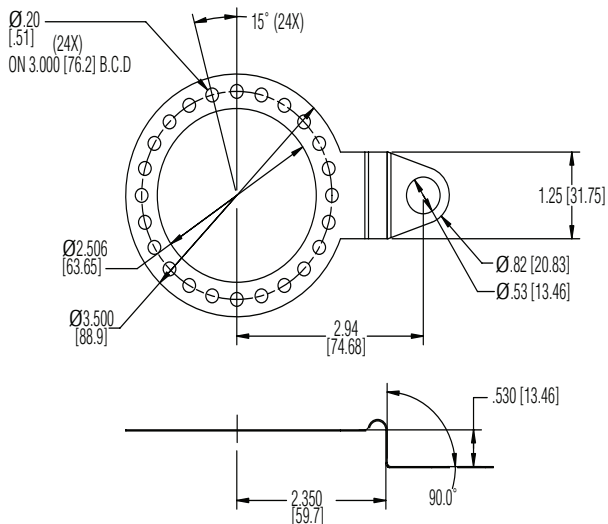


114574-0001 TETHER KIT (SLOTTED TETHER)

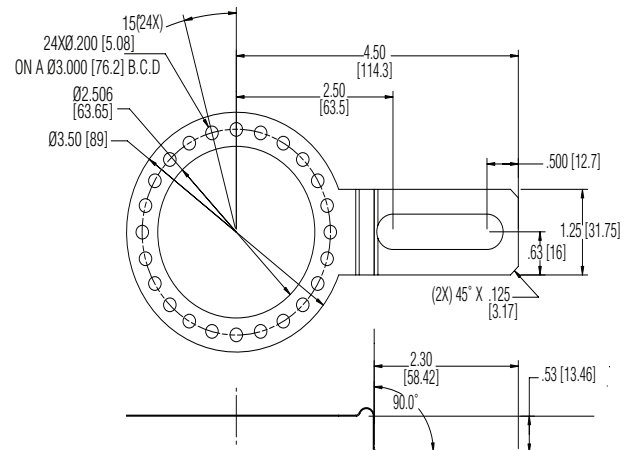

114575-0001 TETHER KIT (8.5" C- FACE)

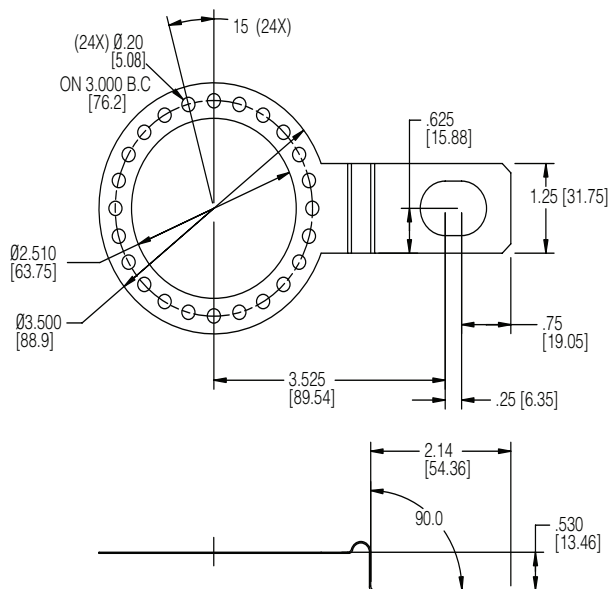

SWIVEL ROD TETHER



Note: See accessories section on page two for Swivel Rod Part Numbers

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>