

Инкрементальный энкодер для работы в опасных зонах ISW38 Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>

SERIES ISW38

NorthStar™ brand

Hazardous Duty Encoder

Key Features

- Draw Works Threaded Shaft with Field Replaceable Adapters for Reduced Downtime
- ATEX, UL and IECEx Certified for Hazardous Duty Applications
- Class I, Division 1 and Zone 0 Certified
- Anodized Aluminum or Stainless Steel Housing
- NAMUR Sensor Output Available

HAZ
Hazardous Duty



II1G
Ex ia op is IIB T4 Ga

E116133
Class 1, Div 1 Group C&D

SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Code: Incremental, Optical

Resolution: 1 to 9,000 PPR (pulses/revolution)

Format: Two channel quadrature (AB) with optional Index (Z), and complementary outputs

Phase Sense: A leads B for CCW shaft rotation viewing the shaft clamp end of the encoder

Quadrature Phasing: $90^\circ \pm 30^\circ$ electrical

Symmetry: $180^\circ \pm 25^\circ$ electrical

Index: 180° default gated to B low

Waveforms: Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pf

ELECTRICAL

Input Power: 5VDC, 7-26VDC

Outputs:

2N2222 Open Collector: 250mA, sink max

7272 Push-Pull: 40mA, sink or source

7272 Differential Line Driver: 40 mA, sink or source

7273 Open Collector: 40mA, sink max

Frequency Response: 200 kHz (data and index)

Noise Immunity: Tested to EN61326-1

Electrical Immunity: Reverse polarity (All models); Short circuit protection (7272 and 7273 line drivers only)

Termination: 6, 7, or 10 pin MS Connector; M23 Connector; Cable exit with seal

Mating Connector:

6 pin, style MS3106A-14S-6S (MCN-N4);

7 pin, style MS3106A-16S-1S (MCN-N5);

10 pin, style MS3106A-18-1S (MCN-N6);

10 pin, NEMA4 style (MCN-N6N4)

12 pin CW, M23 Connector (MCN-C1)

Cable with 5 pin M12 Connector (112859-XXXX)

Cable with 8 pin M12 Connector (112860-XXXX)

MECHANICAL

Shaft Sizes:

1"-14 UNS x 5/8" - 18 UNF Threaded Shaft;

1"-14 UNS Threaded Shaft;

1"-14 UNS x 5/8" - 18 UNF Field Replaceable Threaded Shaft

Shaft Speed: 6000 RPM max

Bore Loading: Up to 20 lbs axial and radial

Bore Runout: 0.0005 TIR at midpoint

Starting Torque: 4.5 in-oz. max (at 25°C)

Running Torque: 4.0 in-oz. max (at 25°C)

Bearings: 61806-ZZ

Housing and Cover: Hard Anodized Aluminum. Also available in Electroless Nickel finish and Stainless Steel

Shaft Material: 300 series stainless steel

Disc Material: Aluminum

Weight: 35 ounces, typical

ENVIRONMENTAL

Operating Temperature: -40 to 80°C

Storage temperature: -40 to 100°C

Shock: 400g for 6ms duration

Vibration: 5 to 3000Hz @ 20g


Humidity: Up to 98% (non-condensing)

Enclosure Rating: IP67

STANDARD DATA AND INDEX

Not all complements shown

$\bar{A}$ shown for reference

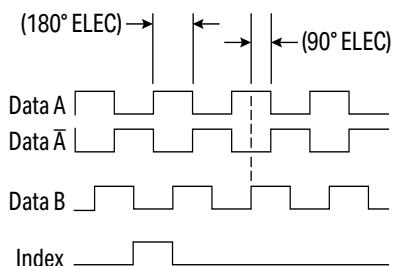

Index Width: 180° Default
A leads B, CCW (from shaft end)

SERIES ISW38

NorthStar™ brand

ORDERING INFORMATION

To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: PPR	Code 3: Shaft	Code 4: Output Format	Code 5: Termination	Code 6: Options
ISW38					
ISW38 Hazardous Duty Encoder	Enter Custom PPR from 0001 to 9000 Examples: 0001 = 1 PPR 0256 = 256 PPR 1024 = 1024 PPR 8192 = 8192 PPR 9000 = 9000 PPR	0 1"-14 UNS x 5/8" - 18 UNF Threaded Shaft 1 1"-14 UNS Threaded Shaft 2 1"-14 UNS x 5/8" - 18 UNF Field Replaceable Threaded Shaft	A Single Ended ABZ, 7-26VDC in, 7-26V out push-pull (7272) C Single Ended ABZ, 5VDC in, 5V out push-pull (7272) D Single Ended ABZ, 7-26VDC in, 5V out push-pull (7272) E Single Ended ABZ, 7-26VDC in, 7-26V out Open Collector (7273) F Single Ended ABZ, 7-26VDC in, 7-26V out Open Collector (2222) G Single Ended ABZ, 7-26VDC in, 7-26V out Open Collector with 1kOhm (2222) Options H, J and K not available when Code 5 is H H Differential AB only, 5VDC in, 5V out (7272) J Differential AB only, 7-26VDC in, 7-26V out (7272) K Differential AB only, 7-26VDC in, 5V out (7272) Options L, M, P not available when Code 5 is 0, 1, 5, 6, H L Differential ABZ, 5VDC in, 5V out (7272) M Differential ABZ, 7-26VDC in, 7-26V out (7272) P Differential ABZ, 7-26VDC in, 5V out (7272) Option N available only when Code 2 is 0015 and Code 6 is 0, 1, or 2 N Namur output*, 15mA max * Hazardous certification for Namur output covered under separate certificate.	0 6 pin connector 1 7 pin connector 2 10 pin connector 3 12 pin connector 5 6 pin+mating connector 6 7 pin+mating connector 7 10 pin+mating connector 8 12 pin+mating connector A .5m (18") cable C 1m (36") cable D 2m (72") cable H 5 pin M12 connector J 8 pin M12 connector K 1.5 ft (18") cable with inline 10 pin connector M 5 ft (60") cable N 10 ft (120") cable	0 Aluminum Housing 1 Nickel Finish Housing 2 Stainless Steel Housing 3 Dual Isolated Outputs, Aluminum Housing† 4 Dual Isolated Outputs, Nickel Housing† 5 Dual Isolated Outputs, Stainless Steel Housing† † Simultaneous use of redundant outputs will void ATEX certification and is not allowed. Consult factory for details.

ACCESSORIES

Cable Assemblies with MS Connector

SKU	Pins		Use with...
108594-XXXX	6 Pin MS	Connector, Cable Assembly	single ended outputs
108595-XXXX	7 Pin MS		single ended outputs
108596-XXXX	7 Pin MS		differential line driver without index outputs
1400635XXXX	10 Pin MS		differential line driver with index outputs
109209-XXXX	NEMA4 10 pin MS		differential line driver with index outputs

Cable Assemblies with M23 Connector

SKU	Pins		Use with...
115901-XXXX	12 pin M23, CW	Connector, Cable Assembly	differential line driver with index outputs

Cable Assemblies with M12 Connector

SKU	Pins		Use with...
112859-XXXX	5 Pin M12	Connector, Cable Assembly	single ended outputs
112860-XXXX	8 Pin M12		single ended outputs
112860-XXXX	8 Pin M12		differential line driver outputs

Note: Standard cable length is 10 feet but may be ordered in any length in 5 foot increments. For example, for a 20 foot cable, replace XXXX with -0020.

Mating Connectors (no cable)

SKU	Pins	Style
MCN-N4	6 pin	MS3106A-14S-6S
MCN-N5	7 pin	MS3106A-16S-1S
MCN-N6	10 pin	MS3106A-18-1S
MCN-N6N4	10 pin	NEMA4
MCN-C1	12 Pin	CW M23 Connector

SERIES ISW38

NorthStar™ brand

ELECTRICAL CONNECTIONS

6, 7 and 10 Pin MS and M23 Connectors and Cables

Connector and mate/accessory cable assembly pin numbers and wire color information is provided here for reference. Models with direct cable exit carry the color coding as shown in the right hand column.

Table 1											
Encoder Function	Cable # 108594-XXXX 6 Pin Single Ended		Cable # 108595-XXXX 7 Pin Single Ended		Cable # 108596-XXXX 7 Pin Diff Line Driver without Index		Cable # 109209-XXXX* or 1400635XXXX 10 Pin Diff Line Driver with Index		Cable # 115901-XXXX 12 Pin (CW)		Cable Exit with Seal
	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Wire Color
Signal A	E	BRN	A	BRN	A	BRN	A	BRN	5	BRN	GRN
Signal B	D	ORG	B	ORG	B	ORG	B	ORG	8	ORG	BLU
Signal Z [†]	C	YEL	C	YEL	—	—	C	YEL	3	YEL	ORG
Power +V	B	RED	D	RED	D	RED	D	RED	12	RED	RED
Common	A	BLK	F	BLK	F	BLK	F	BLK	10	BLK	BLK
Case	—	—	G	GRN	G	GRN	G	GRN	9	—	WHT
N/C	F	—	E	—	—	—	E	—	7	—	—
Signal $\bar{A}$	—	—	—	—	C	BRN/WHT	H	BRN/WHT	6	BRN/WHT	VIO
Signal $\bar{B}$	—	—	—	—	E	ORG/WHT	I	ORG/WHT	1	ORG/WHT	BRN
Signal $\bar{Z}^{\dagger}$	—	—	—	—	—	—	J	YEL/WHT	4	YEL/WHT	YEL

5 and 8 Pin M12 Accessory Cables when Code 5 = H or J

Connector pin numbers and cable assembly wire color information is provided here for reference.

Table 2						
Encoder Function	Cable # 112859-XXXX 5 Pin Single Ended		Cable # 112860-XXXX 8 Pin Single Ended		Cable # 112860-XXXX 8 Pin Differential	
	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Signal A	4	BLK	1	BRN	1	BRN
Signal B	2	WHT	4	ORG	4	ORG
Signal Z [†]	5	GRY	6	YEL	6	YEL
Power +V	1	BRN	2	RED	2	RED
Common	3	BLU	7	BLK	7	BLK
Signal $\bar{A}$	—	—	—	—	3	BRN/WHT
Signal $\bar{B}$	—	—	—	—	5	ORG/WHT
Signal $\bar{Z}^{\dagger}$	—	—	—	—	8	YEL/WHT

Notes:

Cable Configuration (Table 1): PVC jacket, 105°C rated, overall foil shield; 3 twisted pairs 24 AWG (output signals), plus 2 twisted pairs 22 AWG (input power)

Cable Configuration (Table 2): PVC jacket, 105°C rated, overall foil shield; 24 AWG conductors, minimum

Standard cable length is 10 feet but may be ordered in any length in 5 foot increments. For example, for a 20 foot cable, replace -XXXX with -0020

"MS" Type mating connectors and pre-build cables are rated NEMA 12

"M12" Cable assemblies are rated IP67




*For watertight applications, use NEMA4 10 pin cable and connector 109209-XXXX

[†] Index not provided on all models. See ordering information

SERIES ISW38

NorthStar™ brand

Dimensions: inch [mm]

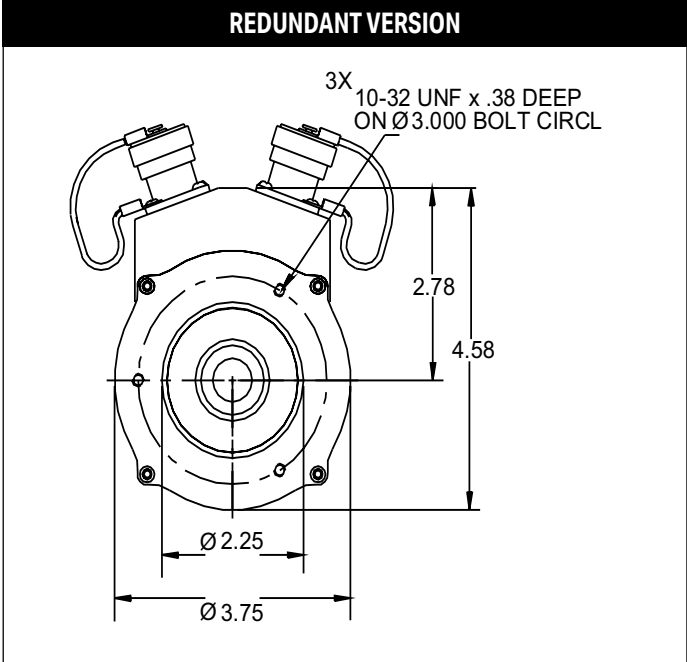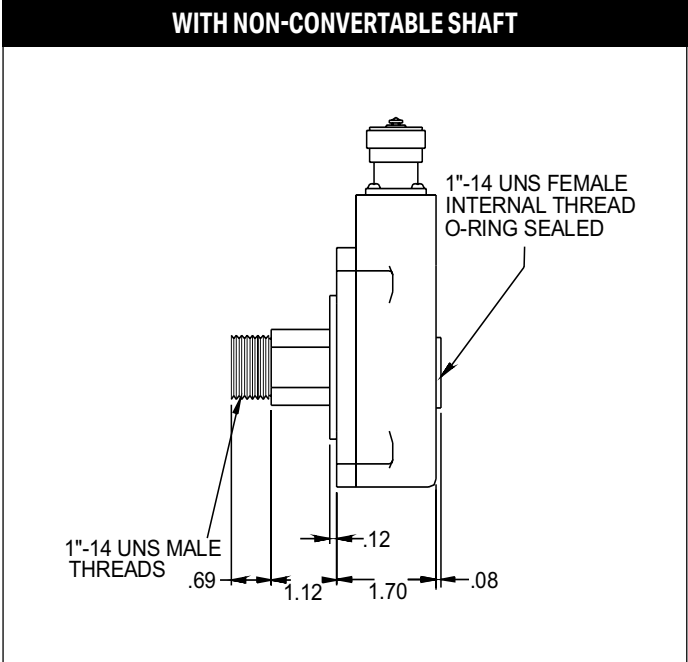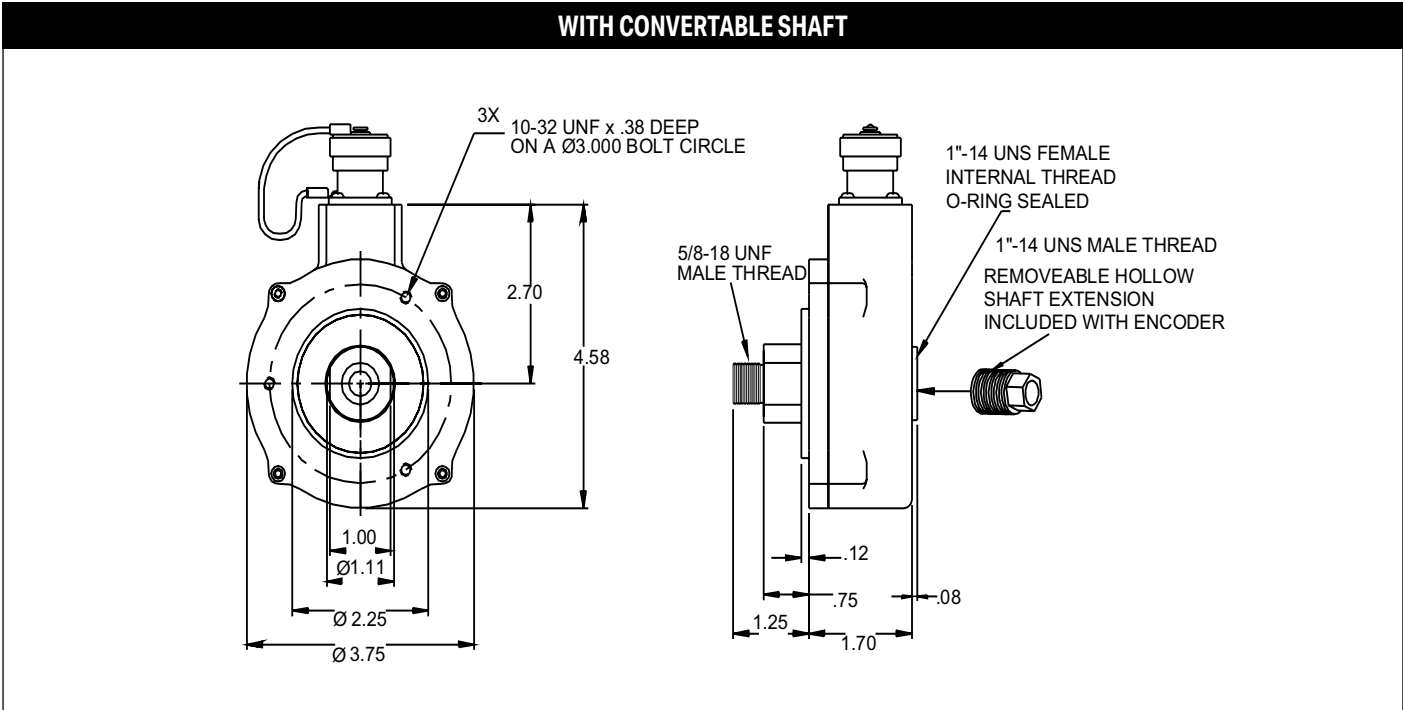

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>