

Сверхмощный датчик скорости AG25

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>



AG25 Agricultural Encoder



High Robustness for Maximum Uptime

The AG25 Heavy-Duty Encoder is a speed/rotation sensor dedicated to off-road vehicles (OHV) in agricultural applications.

Its construction is robust, with resistant plastic casing, resin sealed electronics, stainless steel shafts and screws and automotive connectors.

These characteristics combined with magnetic sensing technology make AG25 fully resistant to chemical contaminants common in the field, such as fertilizers (including NPK), oils and dust.

Main Characteristics

- Magnetic technology sensor
- 180, 360 or 512 PPR resolutions
- Resistant to corrosion by chemical agents (including NPK)
- 70 mm external diameter
- Operating temperature from 0°C to 70°C

Mechanical Characteristics

Maximum speed	500 RPM
Starting torque	0 N.cm
Runout (assembly shaft)	+/- 0.13 mm (maximum)
Endplay (assembly shaft)	+/- 0.6 mm
Shaft diameter	1", Hubshaft (semi-hollow)
Shaft mounting	2 headless screws (stainless steel)


Electrical Characteristics

Power Supply	5 to 26 VCC
Output	HTL (5-26 VCC) or TTL (5 VCC) 40mA maximum
Consumption	< 100mA
Maximum Frequency	300 kHz (sensor)
Resolution	180, 360 or 512 PPR
Electrical Protection	Polarity reversal, short-circuit between outputs and overvoltage
Simmetry	180°C ± 90°C

Signal Format

A 

Dimensional Drawing

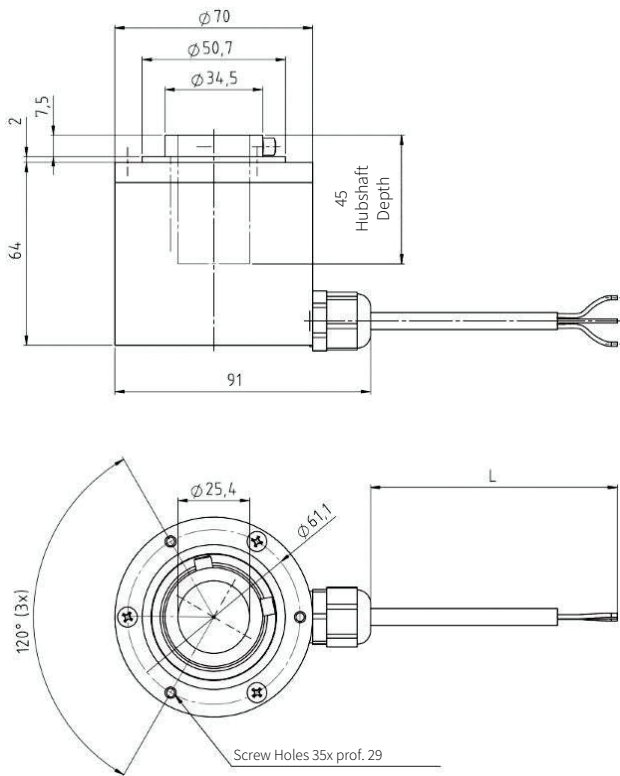


Environmental Characteristics

Operating temperature	-15°C to 70°C
Storage temperature:	-20°C to 70°C
Shock	50 G / 6ms
Vibration	5 Hz to 2000Hz / 10G
Humidity	Up to 98% non-condensing
IP rating	IP67


Electrical Connection

Option "0" - Without Connector (pig tail)



Wire	Function
Red	Power supply (+V)
Black	Common
White	Channel A
Mesh	Shield

Option "N" - 3-Pin male Deutsch Connector



Pin	Function
A	Channel A
B	Common
C	Power supply (+V)

Option "P" - 3-Pin Delphi Connector



Pin	Function
A	Power supply (+V)
B	Common
C	Channel A

Coding

Code 1 Model	Code 2 PPR	Code 3 Shaft	Code 4 Shaft	Code 5 Output	Code 6 Connection	Code 7 Cable	Code 8 Plug
AG25	☐ ☐ ☐ ☐	☐	☐	☐	☐	☐	☐
AG25	0180 0360 0512	H 1"	N Without spring tether Y With spring tether	A 5V - TTL - Channel A Only (Push Pull Line Driver) B 5-26V - HTL - Channel A Only (Push Pull Line Driver)	A Cable press lateral	1 1.5 meters 2 2 meters 3 3 meters 4 4 meters 5 5 meters 6 6 meters 7 7 meters 8 8 meters 9 9 meters A 10 meters B 15 meters C 20 meters D 25 meters E 30 meters	0 Without connector (pig tail) N 3-Pin male Deutsch Connector P 3-pin Delphi Connector

For other PPR Consult the factory (max. 1024-

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>