

Сверхмощный резолвер R56

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>

SERIES R56

Heavy Duty Resolver

- Harowe Resolver in NorthStar Housing
- Large Outer Bearings Isolate Shaft Loads
- Foot Mount or 56 C-Face Mount
- Excellent Zero-Speed Output
- Suitable Replacement for the Reliance Automax Resolvers 800123-R, 800123-S, 800123-1R and 800123-1S*




STANDARD OPERATING CHARACTERISTICS

ELECTRICAL	One Speed Winding	Two Speed Winding
Sensing Method	Sine/Cosine	Sine/Cosine
Electrical Cycles	1	2
Excitation	26 ±5% Vrms 2.4 kHz	26 ±5% Vrms 2.4 kHz
Input Current	22 Max mAmps	45 Max mAmps
Null Voltage	25 Max mVrms	25 Max mVrms
Position Error	±10 ArcMin	10 ArcMin Max
DC Resistance (R1-R2)	255 Ohms ±15%	190 Ohms ±15%
DC Resistance (S1-S3 and S2-S4)	176 Ohms ±15%	322 Ohms ±15%
Transformation Ratio	0.454 ±10%	0.454 ±10%
Phase Shift	6 degrees	18 degrees
Dielectric Strength to Case	500 VAC w/2 Max mAmps	500 VAC w/2 Max mAmps
Dielectric Strength to Phase to Phase	250 VAC w/2 Max mAmps	250 VAC w/2 Max mAmps

ELECTRICAL CONNECTIONS

Signal	Pin
R1 – Rotor Hi	1
R2 – Rotor Lo	2
S1 – Cos Hi	3
S3 – Cos Lo	4
S2 – Sin Hi	5
S4 – Sin Lo	6

SCHEMATIC

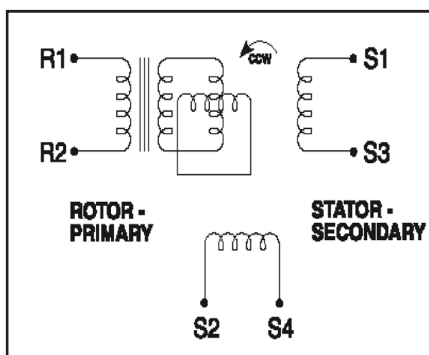

MECHANICAL

Shaft Size: 5/8" stainless steel, 56 C-Face NEMA style; single or dual shaft

Shaft Loading: 100 lbs. radial, 50 lbs. axial

Shaft Speed: 3600 RPM max.

Mounting: Foot mount; NEMA 56C face mount

Connector: Industrial 10pin latching connector

Housing and Cover: Aluminum

Shaft Material: Stainless Steel

Weight: 11 lbs. max.

ENVIRONMENTAL

Operating Temperature: -40 to +120°C

Storage Temperature: -40 to +130°C

Shock: 50 G's for 11 milliseconds duration

Vibration: 5 to 2000 Hz at 10 G's

Humidity: Up to 98% (non-condensing)

Enclosure Rating: IP65 (dust proof, washdown)

*Reliance and Automax are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement.

SERIES R56


Ordering Information

To order, complete the model number with code numbers from the table below:

Code 1: Model	Code 2: Resolver Speed	Code 3: Shaft	Code 4: Termination
R56	—	□	□
Ordering Information			
R56 Foot Mount or NEMA 56C Face Mount Resolver	1	S Single, 5/8"	L Latching Industrial Connector
	2	D Dual Shaft, 5/8"	

DIMENSIONS inches [mm]

Tolerances: XXX ± 0.010 ; XX ± 0.02

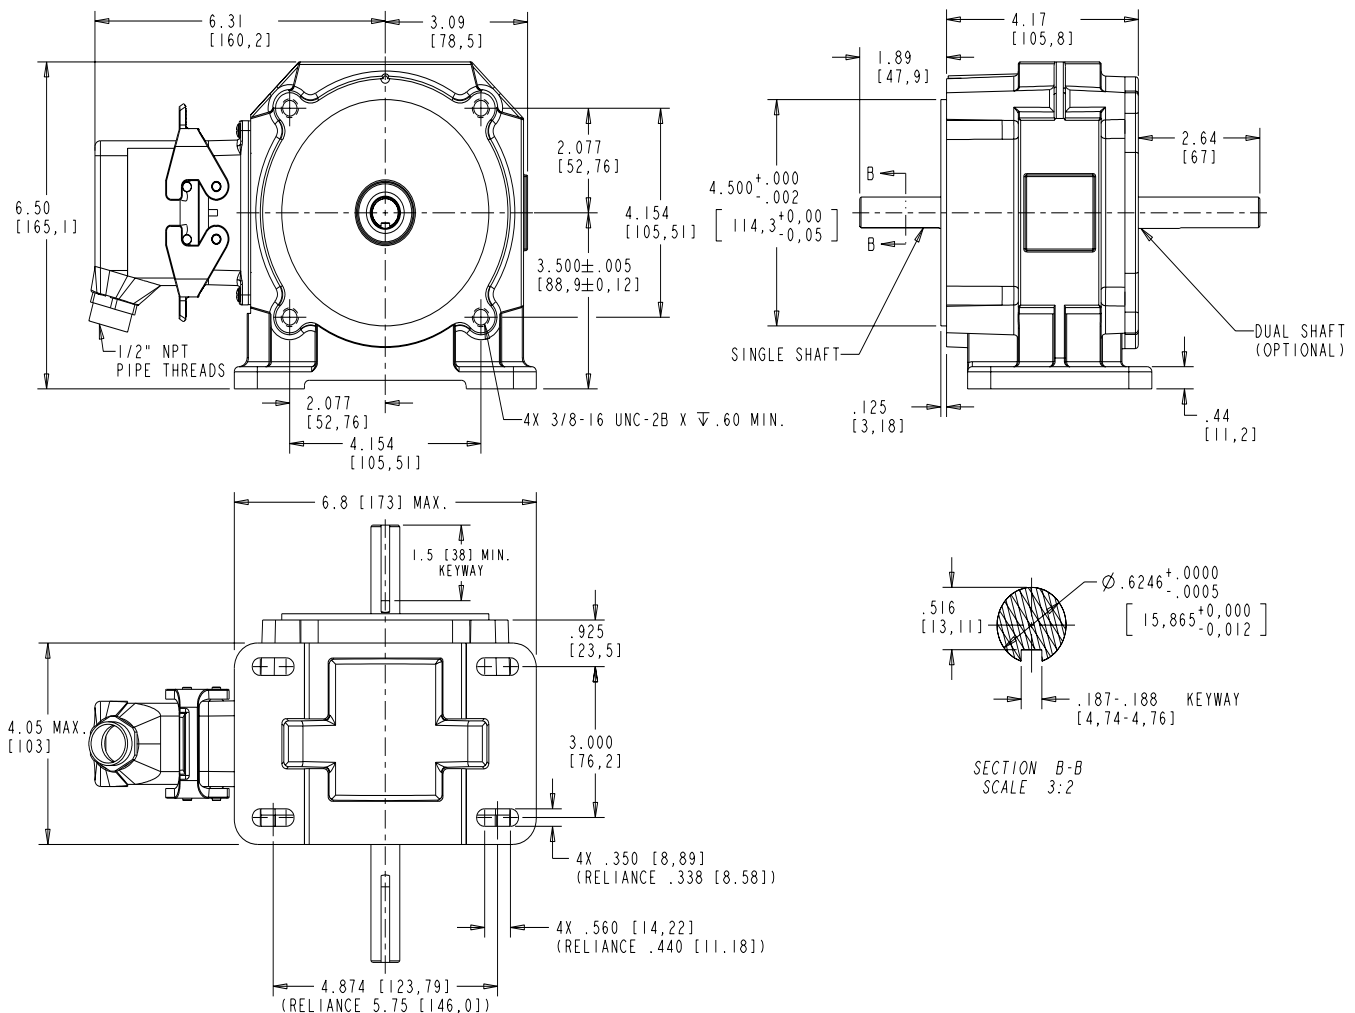

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: drx@nt-rt.ru || сайт: <https://dynapar.nt-rt.ru/>